

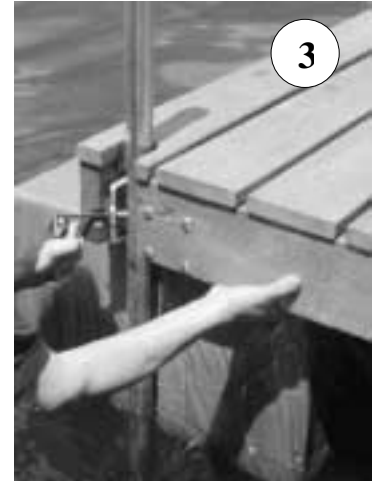


# Jamix Dock Installation Instructions

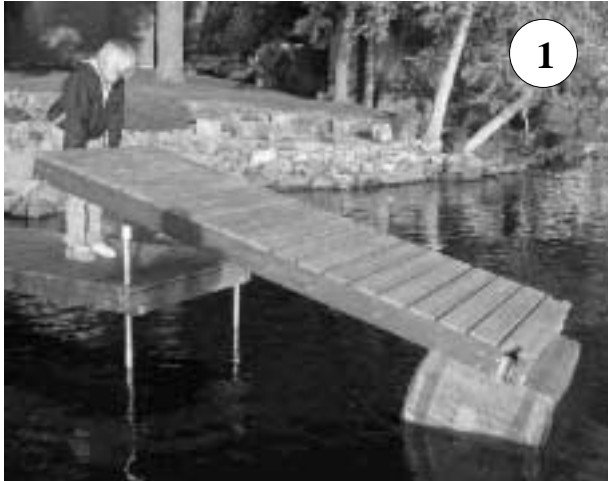

- *Cut pipes to length.*
- *Install footpads on each pipe.*
- 1. Float or carry first section into position.**
- 2. Rest the post foot firmly on the lake bottom. Now, side load the top end of the vertical pipe into the post brackets.**
- 3. Tighten the setscrew in the post bracket to lock the dock frame on the pipe.**
- 4. Repeat steps 3 through 5 for each dock section, locking into the previous sections hook bracket.**
- *Trim the top of each pipe so all pipes have the same length above the dock. A pipe cutter may be rented from your local rental store.*
- *Mark each pipe for next years installation.*

**Note:** *Items in italics are only for first year's installation.*  
**After the first year only items in bold are required.**

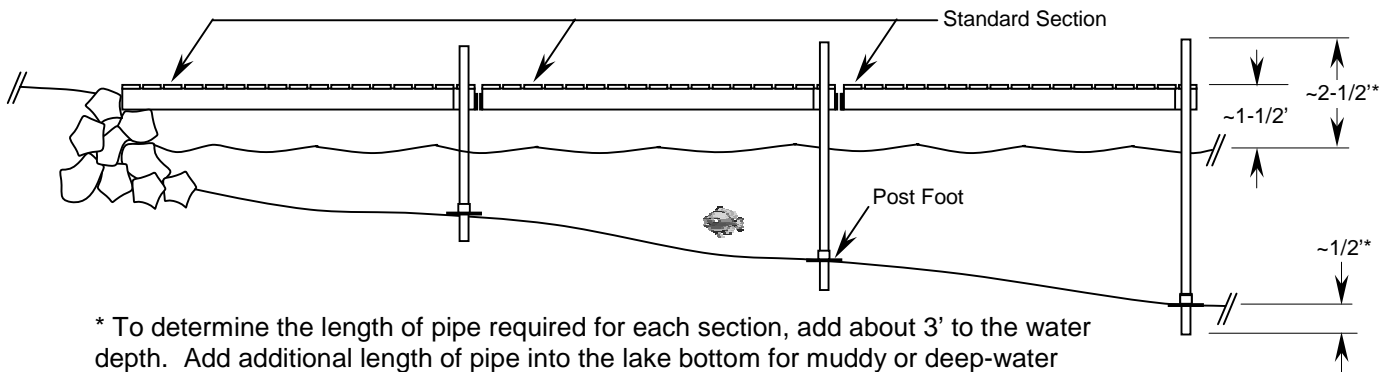

A starter section (with 4 posts instead of 2) is a great way to start most docks.

